

Technical Data


alkitorc® - Hydraulic pumps



alkitorc® - Pneumatic-Hydraulic Pump with remote control infinitely variable up to 700 bar (operating pressure 700 bar max.)

Designation / Ref. No.	Type LHP / 71508
Drive	pneumatic
Inlet air pressure/Volume flow	2 - 6 bar / 10-15 l s ⁻¹
Oil flow (low pressure)	4,0 l/min to 40 bar
Oil flow (high pressure)	0,4 l/min to 700 bar
Tank capacity	7 Litres
Weight including oil	approx. 26 kg
Surrounding temperature	-20 ° C to +50 °
Noise emission	< 78 dB(A)
Measures L x W x H (mm)	330 x 250 x 420
Price	
Hydraulic oil: HLP 46 (additional hydraulic-oil grades upon request)	

alkitorc® - Electrical-Hydraulic Pumps with remote control up to 700 bar infinitely variable (700 bar max. pressure)

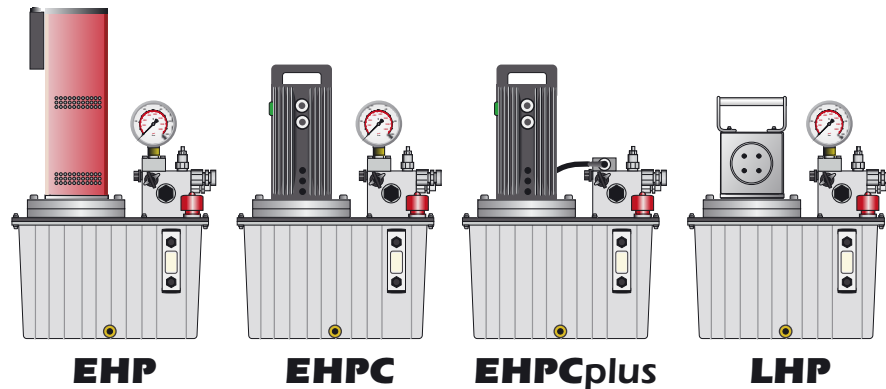

Designation / Ref. No.	EHP / 71501	EHPC / EHPCplus 71506 / 71513
Drive electrical	110/253 V - 45/66 Hz	110/253 V - 45/66 Hz
Nominal sensitivity	2000 W max.	2000 W max.
Oil flow low pressure	10,5 l/min to 40 bar	9,5 l/min to 40 bar
Oil flow high pressure 1	2,5 l/min to 250 bar	2,2 l/min to 200 bar
Oil flow high pressure 2	0,6 l/min to 700 bar	0,5 l/min to 700 bar
Tank capacity	7 Litres	7 Litres
Weight including oil	approx. 26 kg	approx. 24,5 kg
Surrounding temperature	-20 ° C to +50 ° C	-20 ° C to +50 ° C
Noise emission	< 76 dB(A)	< 76 dB(A)
Dimensions L x W x H (mm)	330 x 250 x 530	330 x 250 x 450
Protection art	Special version	IP 54
	EHP- IP54, Ref.-No. 71502	
Hydraulic oil: HLP 46 (additional hydraulic-oil grades upon request)		

Subject to change without prior notice / E & OE / Figures can differ depending on type.