


Technical Data

alkitronic® - EFW / EFWplus

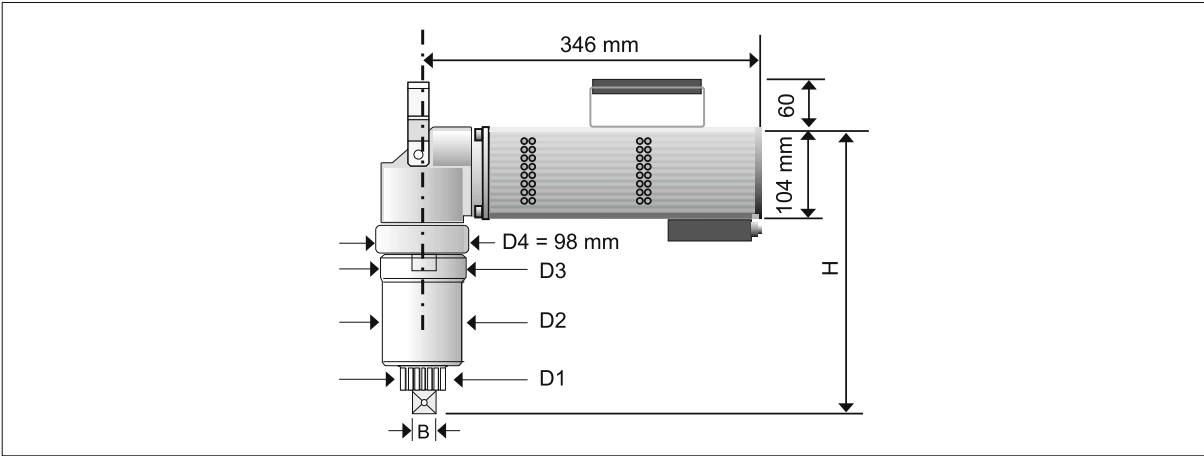

Protection Class IP 54 optionally available

Annotations:

Torque ranges are in accordance with the torque chart.

The following torque ranges are theoretical standard dates based on an aligned tool electronic.

Repeatable accuracy for switch off ± 3% for identically soft and hard joints.

Depending on soft and hard joints M_0 deviations are possible.

Series EFW.. / EFW.. plus	Type	EFW. 250	EFW. 300	EFW. 400	EFW. 600	EFW. 800	EFW. 1000
Torque range approx.*	Nm	435-2695	500-3100	900-4250	1100-6150	1800-7800	2050-9800
Square drive	B	1"	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Diameter approx.	D ₁ mm	54	72	72	72	72	91
Diameter	D ₂ mm	85	98	98	123	148	173
Diameter	D ₃ mm	88	88	88	98	148	173
Height	H mm	285	305	320	350	350	380
Weight without support approx.	kg	13,6	13,6	15,8	19,8	23,8	29
Idle speed approx.	rmin ⁻¹	14	12	8	7	4	3

* Attention: Loosening torque of bolt might be up to 20% higher. Take care to secure and stable the reaction support.

Subject to change without prior notice / E & OE / Figures can differ depending on type.



alki-Technik GmbH
Unterlettenweg 4
D-85051 Ingolstadt

Tel.: +49 841 97499-0
info@alkitechnik.de
www.alkitechnik.de