


Technical Data

alkitronic® - CLV-SG / CLS-SG

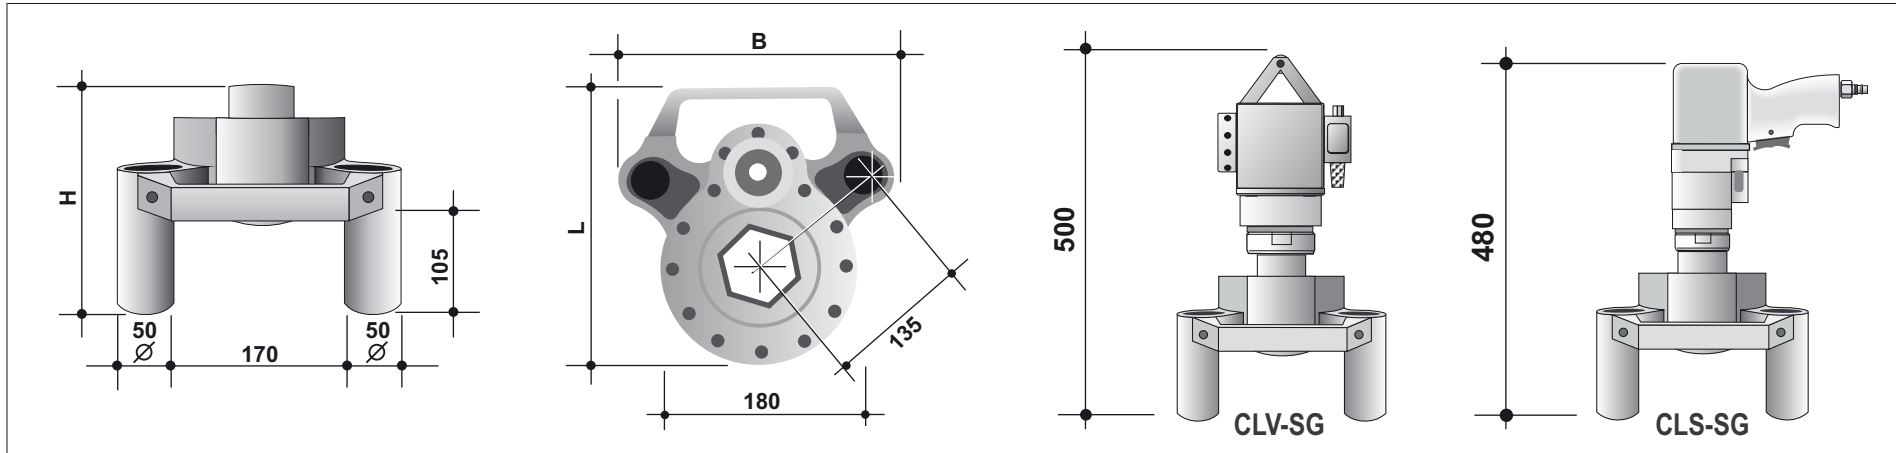

Annotations:

Torque regulation via air supply and a manostat of the maintenance unit.

Torque exactness depends on a stable air network.

An air pressure of 2 - 7 bars at an air volume of approx. 10menstrom von ca. 10-15 l/sek gewähren ein optimales Arbeiten.

Series/Type	CLV-SG 65	CLV-SG 80	Series/Type	CLS-SG 65	CLS-SG 80		
						Torque range approx.* Nm	1280-3780
Height H	mm	225	225	Height H	mm	225	225
Width B	mm	270	270	Width B	mm	270	270
Length L	mm	260	260	Length L	mm	260	260
Weight approx.	kg	18	18	Weight approx.	kg	16,5	16,5
Ratio	i	1:3,77	1:3,77	Ratio	i	1:3,77	1:3,77

* Attention: Loosening torque of bolt might be up to 20% higher. Take care to secure and stable the reaction support.

Subject to change without prior notice / E & OE / Figures can differ depending on type.